


RB-ACC Heavy Duty Recessed Base Air Cylinder Powered with Hydraulic Check and Control Valve Precision Dovetail Slides

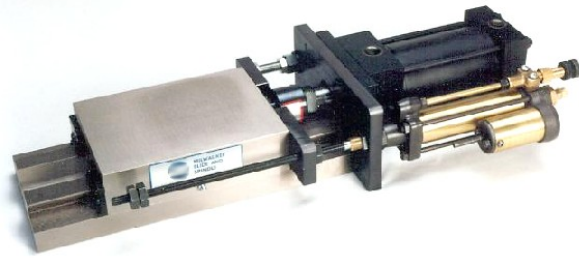

Standard Features

250 P.S.I. Air Working Pressure · Double Acting Non-Cushioned Cylinders
 Hand Flaked Ways · For Controlling Rate of Feed with High Loads
 2", 4", 6", 9", 12", 15" and 18" Hydro-Check Strokes Available

MODEL	SLIDE WIDTH	CARRIER HEIGHT	SLIDE HEIGHT	AVAILABLE LENGTHS				WEIGHT PER INCH OF CAST IRON	
				CARRIER		BASE		CARRIER	BASE
				MINIMUM	MAXIMUM	MINIMUM	MAXIMUM		
RB-ACC 4	4"	1.62"	2.250"	4"	36"	4"	60"	1.00 lbs.	1.05 lbs.
RB-ACC 6	6"	2.00"	3.000"	6"	36"	6"	72"	2.50 lbs.	1.69 lbs.
RB-ACC 8	8"	2.00"	3.250"	8"	36"	8"	72"	3.16 lbs.	2.93 lbs.
RB-ACC 10	10"	2.81"	3.750"	10"	36"	10"	72"	4.80 lbs.	3.66 lbs.
RB-ACC 12	12"	2.43"	4.000"	12"	36"	12"	72"	5.77 lbs.	5.27 lbs.
RB-ACC 16	16"	3.25"	5.000"	16"	60"	16"	100"	9.47 lbs.	9.10 lbs.
RB-ACC 20	20"	3.87"	6.000"	20"	60"	20"	100"	14.43 lbs.	13.58 lbs.
RB-ACC 24	24"	4.50"	7.000"	24"	60"	24"	100"	20.37 lbs.	18.93 lbs.

Accessories

Way Wipers · Accordion Type or Steel Covers · Compounding · Micro Switch Controls
 Tapered Gib · Nickel Plating · Special Cushioning and/or Valving



MILWAUKEE
SLIDE AND
SPINDLE

FAMCO MACHINE DIVISION

BELCO INDUSTRIES, INC.
 1001-31ST STREET
 KENOSHA, WISCONSIN 53140
 PHONE NO.: 1-262-654-3516
 FAX NO.: 1-262-654-0803
 e-mail: SALES@FAMCOMACHINE.COM