


RB Heavy Duty Recessed Base Precision Dovetail Slides

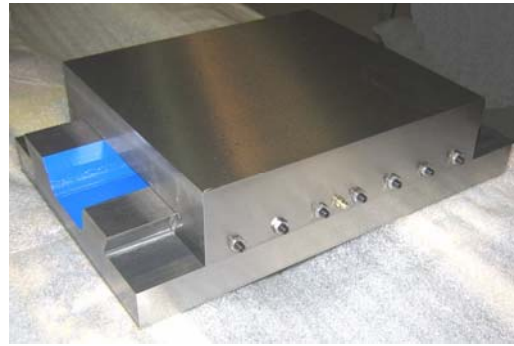

Standard Features

Rigid, Recessed Base for Carrier Drive Applications • Lubrication on All Sizes

MODEL	SLIDE WIDTH	CARRIER HEIGHT	SLIDE HEIGHT	AVAILABLE LENGTHS				WEIGHT PER INCH OF CAST IRON	
				CARRIER		BASE		CARRIER	BASE
				MINIMUM	MAXIMUM	MINIMUM	MAXIMUM		
RB-3	3"	1.00"	1.750"	3"	18"	3"	30"	.57 lbs.	.62 lbs.
RB-4	4"	1.62"	2.250"	4"	36"	4"	60"	1.00 lbs.	1.05 lbs.
RB-6	6"	2.00"	3.000"	6"	36"	6"	72"	2.50 lbs.	1.69 lbs.
RB-8	8"	2.00"	3.250"	8"	36"	8"	72"	3.16 lbs.	2.93 lbs.
RB-10	10"	2.81"	3.750"	10"	36"	10"	72"	4.80 lbs.	3.66 lbs.
RB-12	12"	2.43"	4.000"	12"	36"	12"	72"	5.77 lbs.	5.27 lbs.
RB-16	16"	3.25"	5.000"	16"	60"	16"	100"	9.47 lbs.	9.10 lbs.
RB-20	20"	3.87"	6.000"	20"	60"	20"	100"	14.43 lbs.	13.58 lbs.
RB-24	24"	4.50"	7.000"	24"	60"	24"	100"	20.37 lbs.	18.93 lbs.

Accessories

Rigid Base with Wide Mounting Flanges • Way Wipers • T-Slots • Gib Lock Handles
Ball Screw Compatible • Tapered Gib • Nickel Plating • Compounding



MILWAUKEE
SLIDE AND
SPINDLE

FAMCO MACHINE DIVISION

BELCO INDUSTRIES, INC.

1001-31st STREET

KENOSHA, WISCONSIN 53140

PHONE NO.: 1-262-654-3516

FAX NO.: 1-262-654-0803

e-mail: SALES@FAMCOMACHINE.COM